


# LINEAR MAGNETIC HUMPS

MAGNETIC SEPARATION

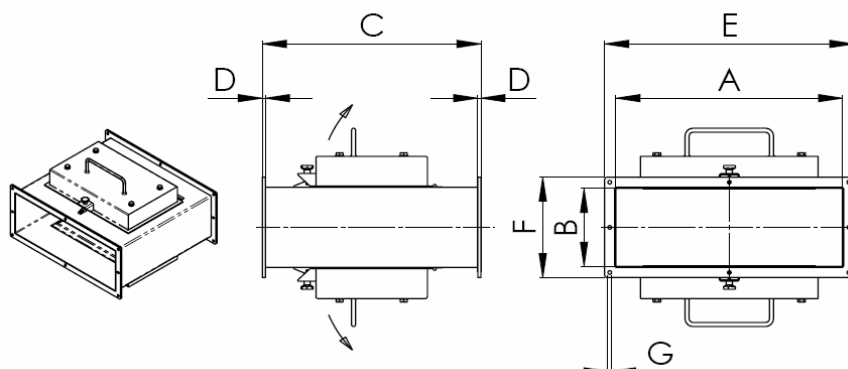

Code	A	B	C	D	E	F	G Ø
TRAPP/30/15/50	300	150	500	6	340	190	8
TRAPP/40/15/50	400	150	500	6	440	190	8
TRAPP/50/15/50	500	150	500	6	540	190	8
TRAPP/60/15/50	600	150	500	6	640	190	10
TRAPP/80/15/50	800	150	500	6	840	190	10
TRAPP/100/15/50	1000	150	500	6	1040	190	10
TRAPP/40/18/55	400	180	550	6	440	220	8
TRAPP/50/18/55	500	180	550	6	540	220	8
TRAPP/60/18/55	600	180	550	6	640	220	10
TRAPP/80/18/55	800	180	550	6	840	220	10
TRAPP/100/18/55	1000	180	550	6	1040	220	10
TRAPP/50/20/60	500	200	600	8	540	240	10
TRAPP/60/20/60	600	200	600	8	640	240	10
TRAPP/80/20/60	800	200	600	8	840	240	10
TRAPP/100/20/60	1000	200	600	8	1040	240	10

All dimensions are in millimeters. Other sizes and shapes available on request

Magnetic humps are used for the separation of accidental ferrous parts from granulates, which are kept in their inside thus guaranteeing the product's quality as well as the safeguard of any machine that might be placed underneath.

Our humps have two magnetic separators assembled inside, which are fixed to the door.

The ferrous parts, attracted and held on the permanent magnet's poles, can be removed, after having interrupted the product's flow, by opening the door, the wide dimensions of which allow the manual cleaning operations.

Our humps are entirely made up of stainless steel.

If requested, we can also supply counter-flanges to be fixed on the customer's structure in order to facilitate the hump's positioning.